



2.5-way Active Tri-Amplified DSP Shallow Speaker



- Flush or Surface Mount
- Exceptional Dynamics and Finesse
- Active Tri-Amplified / Integrated Digital Signal Processing / Room EQ
- Calibration, Diagnostics, and 24/7 monitoring Over IP
- 6" deep
- Basic Specifications:
Dual 8" woofers / 1" annular driver in CSA™ waveguide / Max SPL 1m Long-Short: 113-117dB
80Hz to 20kHz / 600W rack amplifier / DSP x-over and room EQ / 36"x13"x6"

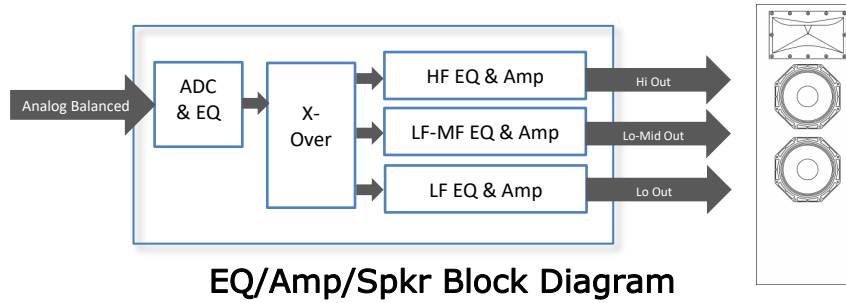


Rixos-L

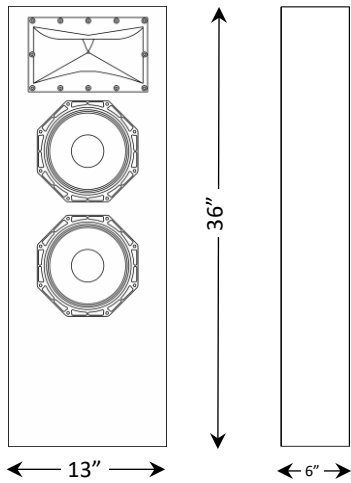

4 Channel DSP Power Amp
3 channels per speaker

Mounting Kit Options:

- On-wall – Concealed by screen or stretched fabric: Three shock-mount L Brackets
- On-wall – Visible: Fabric shroud with painted end caps & mounting cleats.
- In-wall - Visible: Perimeter bracket & fabric-covered grille frame.

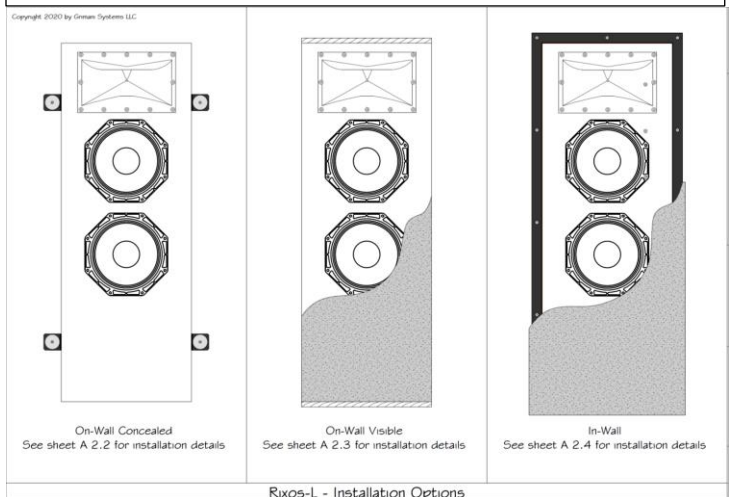

Responses: Axial, Listening Window, Reflections, and Sound Power

