


Rixos-S

GrimaniSYSTEMS
SPELLBINDING HOME ENTERTAINMENT

2-way Active Bi-Amplified DSP Shallow Speaker



- Flush or Surface Mount
- Exceptional Dynamics and Finesse
- Active Bi-Amplified / Integrated Digital Signal Processing / Room EQ
- Calibration, Diagnostics, and 24/7 monitoring Over IP
- 4" deep & 6" deep versions
- Basic Specs:
 - 6.5" woofer / 1" dome in CSA™ waveguide / Max SPL 1m Long-Short: 104-112dB
 - 80Hz to 20kHz / 160W rack amplifier / DSP x-over and room EQ / 18"x13"x4" (Shallow version)

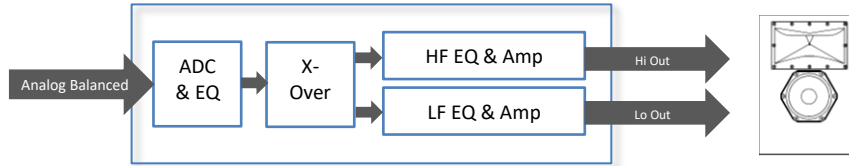


EQ/Amp/Spkr Block Diagram

Multiple Cabinet Configurations




2~4 Channel DSP Power Amp
2 channels per speaker


Rixos-S

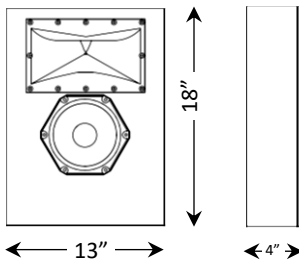

Rixos-SNR

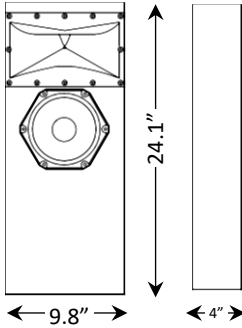

Rixos-SND


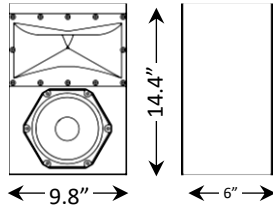


Mounting Kit Options:

On-wall, Concealed by screen or stretched fabric: Three shock-mount brackets

On-wall, Visible: Fabric grille & mounting cleats.

In-wall, Visible: Perimeter flange & fabric-covered grille frame.

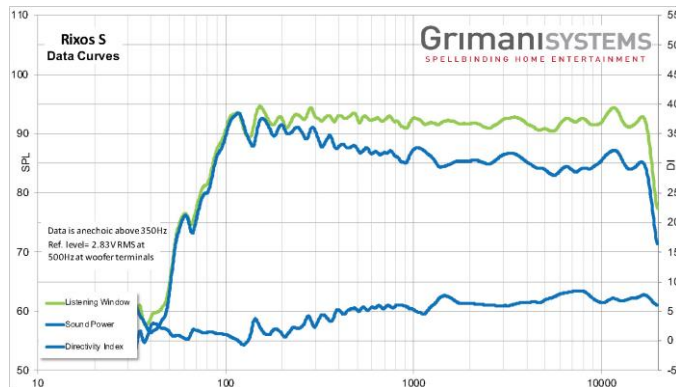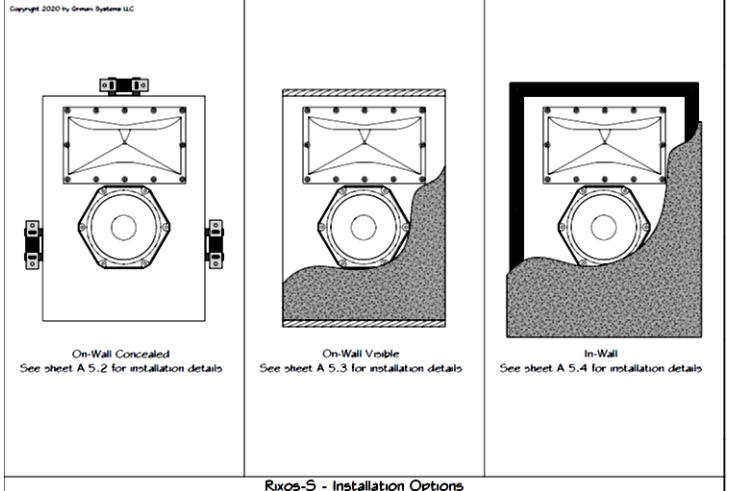

Responses:
Listening Window and Sound Power